

AIROBOT V3



SLS Horsham
The Barn
25 St Leonards Road
Horsham
West Sussex
RH13 6EH

07733 150003
07917 300500

Indian Ocean MVHR Ltd
Unit 13
Socota Phoenixia
Sayed Hossen Road
Phoenix
73408



As standard equipment,
includes:


- integrated CO₂, VOC, air temperature and humidity sensors
- autonomous control – smart control of fans ensures high-quality interior climate
- room occupancy sensing (together with energy saving mode)
- humidity detection mode.

Specifications



Installation	wall-mounted, vertically
Airflow up to	V3: 309 m ³ /h or 86 l/s or 140 m ² ventilated area V3 ERV: 286 m ³ /h or 80 l/s or 140 m ² ventilated area
Heat exchanger	HRV: plate heat exchanger with heat recovery ERV: plate heat exchanger with humidity and heat recovery
Heat recovery efficiency	V3: 89%, V3 ERV: 84%
Filters	panel filters, ePM10 55% (M5) / outside air ePM1 55% (F7)
Power supply	1~230 VAC 50 Hz
Maximum power	1.9 kW (10 A)
Motors	2 × 83 W RadiCal EC
Preheater (frost protection)	integrated, nominal power 1.35 kW PTC, 0–100% control
Special power SPI (V3 / V3 ERV)	0.31/0.31 W/(m ³ /h) ^{219 m³/h / 50 Pa}
Special power SFP (V3 / V3 ERV)	1.12 / 1.12 W/(m ³ /s) ^{219 m³/h / 50 Pa}
Condensate connection (mm)	32 mm
Colours	white, black
Packaging	80 × 60 × 60 cm, weight 45 kg

Energy labels

Airobot V3

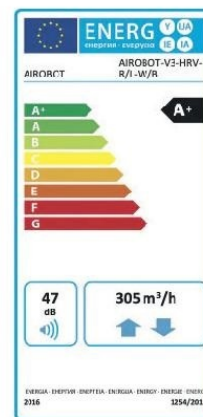

Airobot V3 ERV

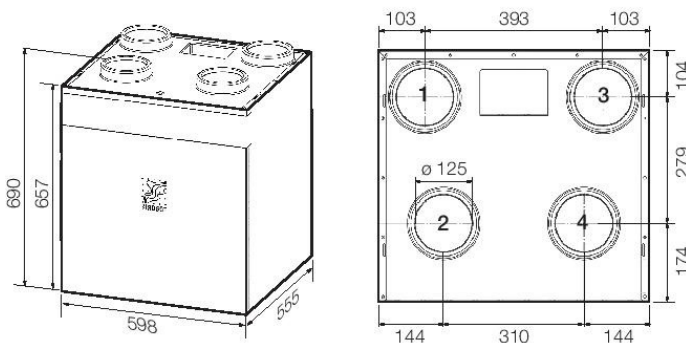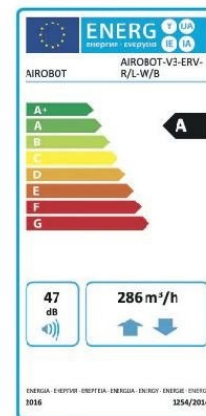

Ducts

Type R

1. Supply air
2. Extract air
3. Exhaust air
4. Outside air

Type L

1. Exhaust air
2. Outside air
3. Supply air
4. Extract air